



# Isotropic(Omnidirectional) Antenna


Isotropic antenna is much suitable for monitoring radio environment on the field test.

## MQL series




Parameter	MQL0106	MQL0618
Frequency	1 – 6GHz	6 – 18GHz
Antenna Gain	-4dBi(Ave.)	-6dBi(Ave.)
Isotropic	±3dB	±4dB
Polarization	Horizontal	Horizontal
VSWR	6(Typ.)	6(Typ.)
Impedance	50Ω	50Ω
Interface	SMA-J	SMA-J


MQL0106

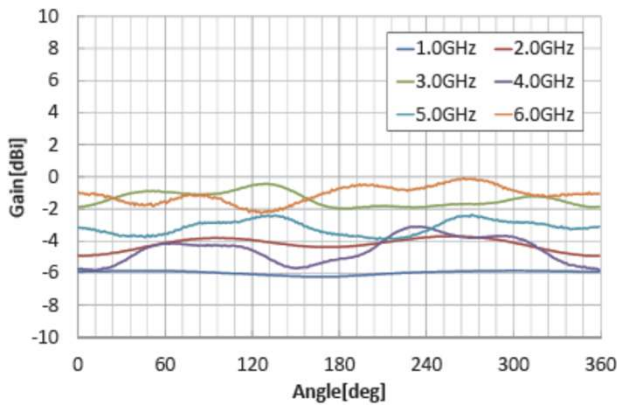


MQL0618

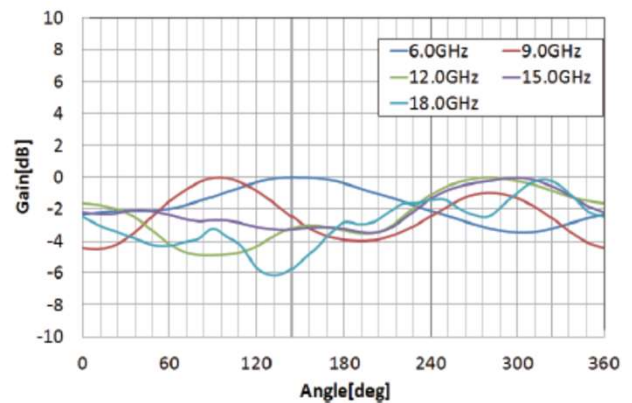

## MBA series

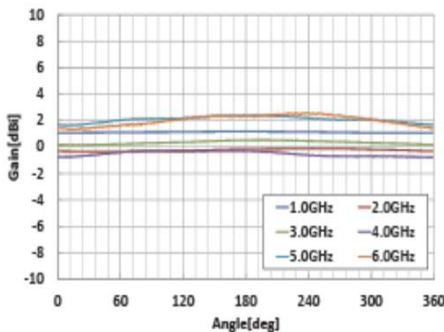

MBA0.8

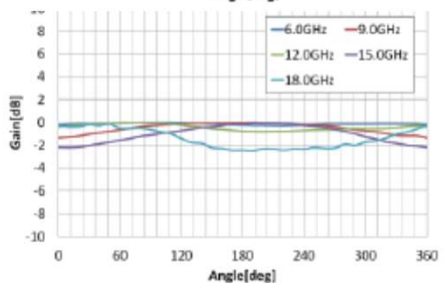

MBA4.0

Parameter	MBA0.8	MBA4.0
Frequency	1 – 6GHz	6 – 18GHz
Antenna Gain	0dBi(Ave.)	0dBi(Ave.)
Isotropic	±3dB	±2dB
Polarization	Vertical	Vertical
VSWR	3(Typ.)	3(Typ.)
Impedance	50Ω	50Ω
Interface	SMA-J	SMA-J